

GVT/PGVT
600x1200 mm

600X1200
MATT



BISCOTTI IVORY

GLOSSY GRANULA

600X1200
MATT



BISCOTTI YELLOW

GLOSSY GRANULA

**600X1200
MATT**



BLUE CORTAN

GLOSSY GRANULA


600X1200
MATT



ORINO VELLY

GLOSSY GRANULA

600X1200
MATT

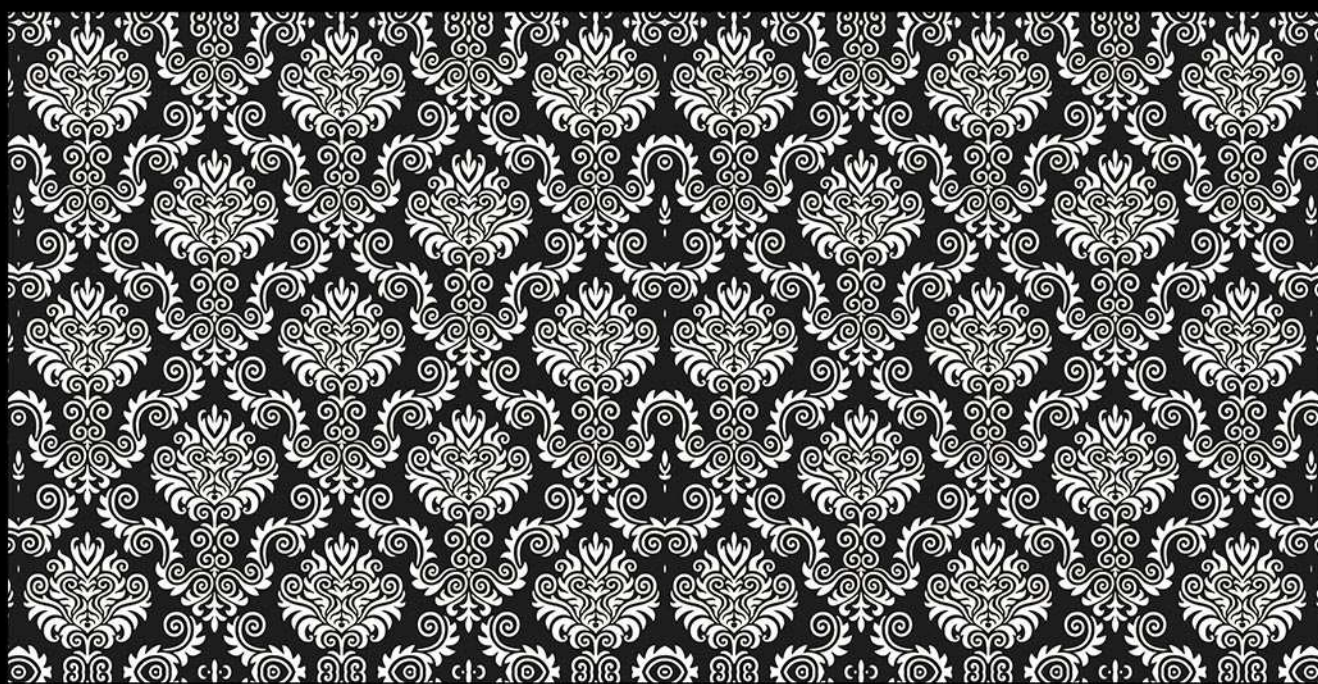

BLACK FLOWER

GLOSSY GRANULA

600X1200
MATT



TRITON

GLOSSY GRANULA

600X1200
MATT



EDISON

GLOSSY GRANULA

600X1200
MATT



BRIO WOOD

GLOSSY GRANULA

600X1200
MATT



ELECTRIC SILVER

LUSTER GRANULA


600X1200
MATT



DIJON

LUSTER GRANULA


600X1200
MATT

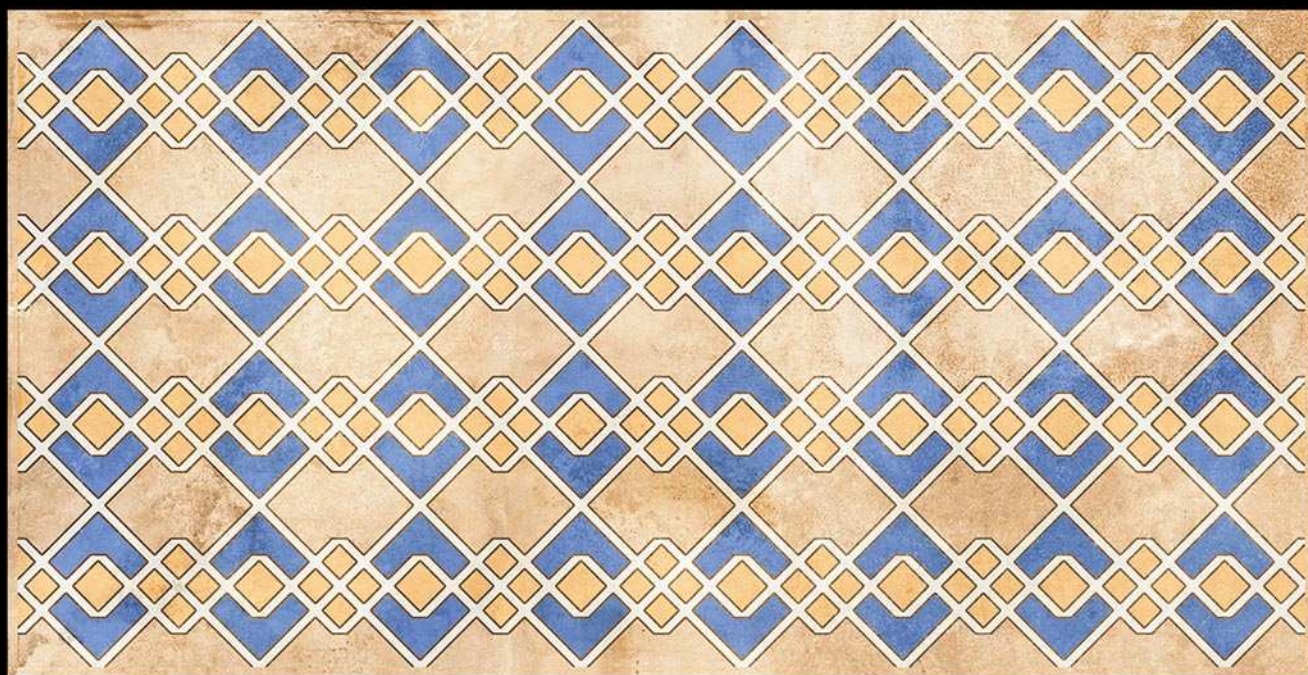

LAUREL

LUSTER GRANULA

600X1200
MATT

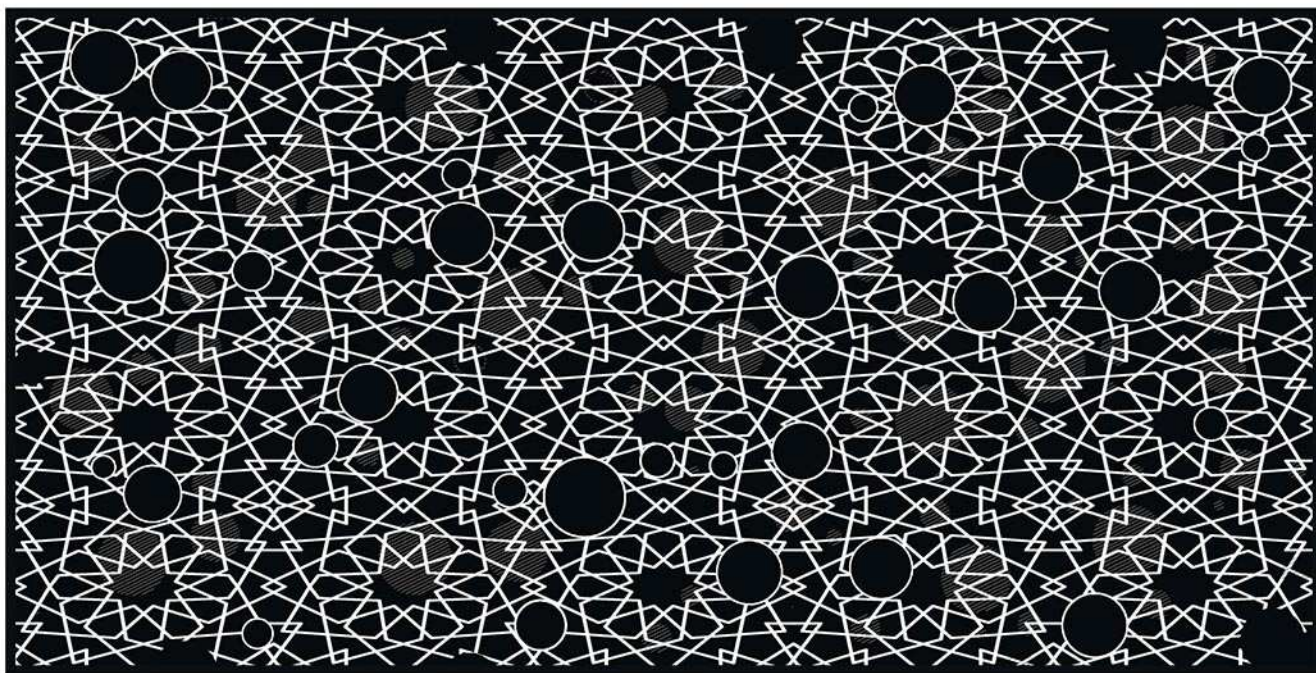

NET BLACK

LUSTER GRANULA


600X1200
MATT



ROSE CLAY

LUSTER GRANULA


600X1200
MATT

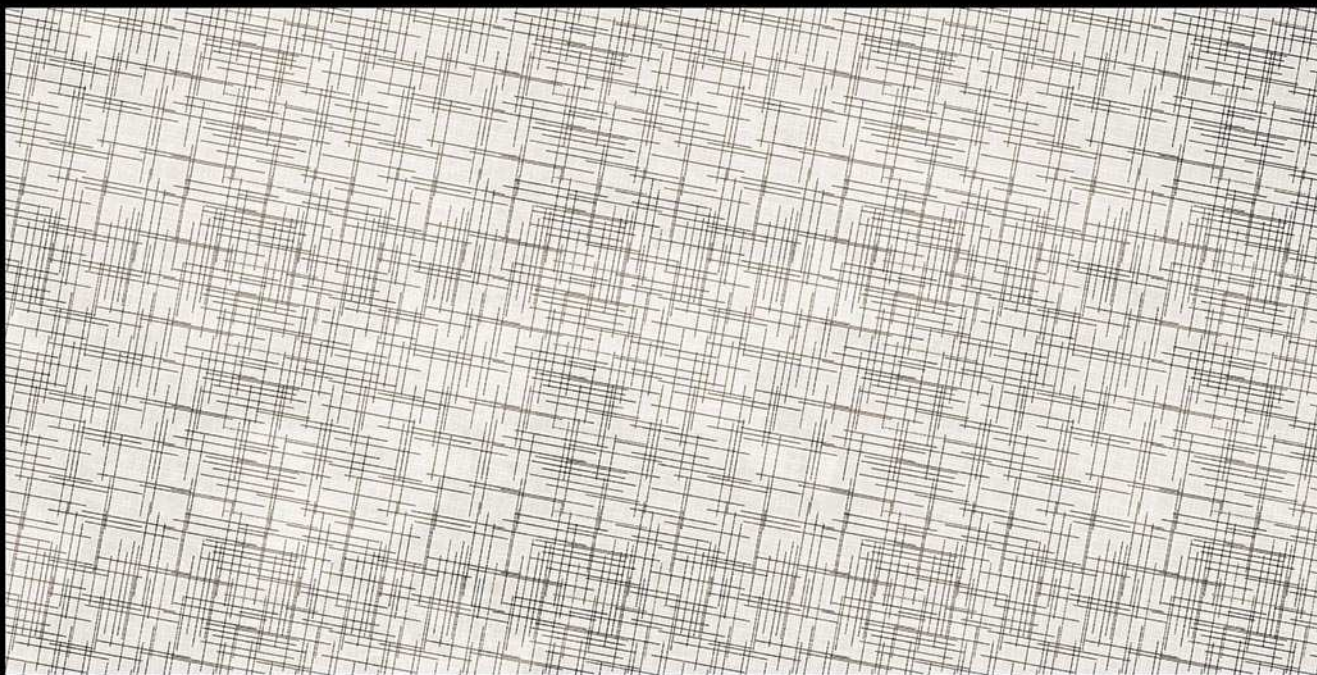

ULTRA BLACK

LUSTER GRANULA


600X1200
MATT

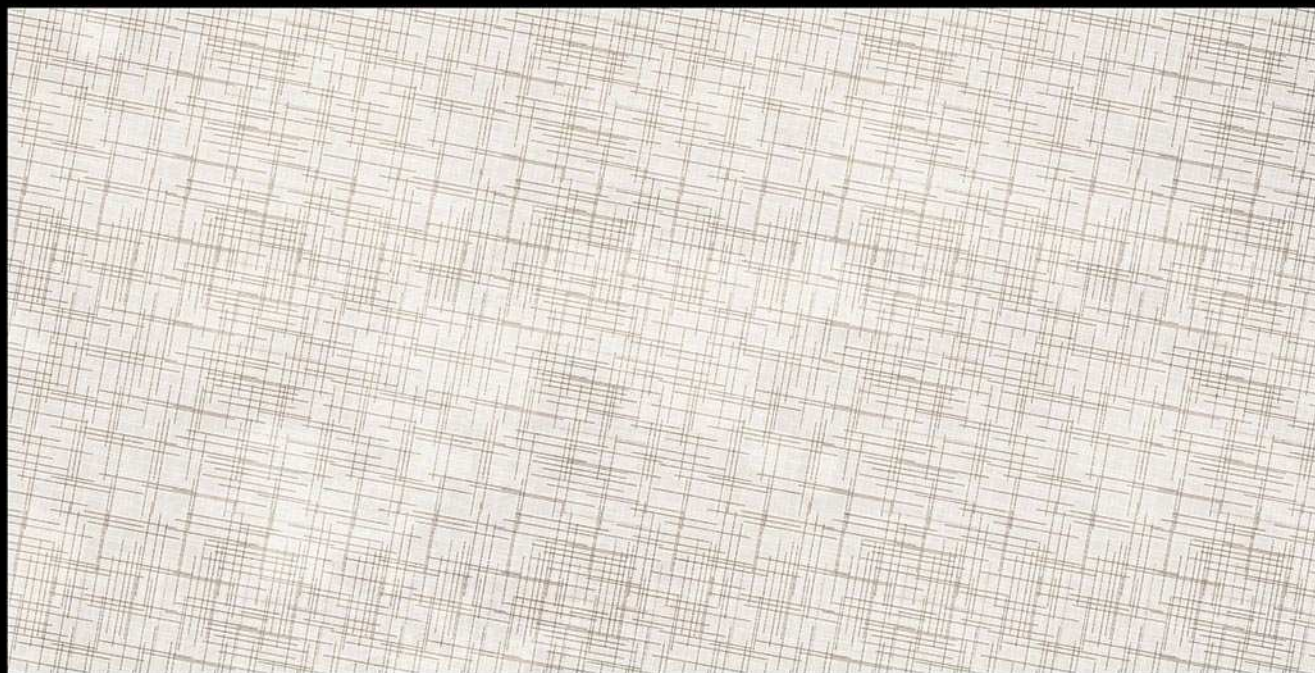

ULTRA WHITE

LUSTER GRANULA


600X1200
MATT

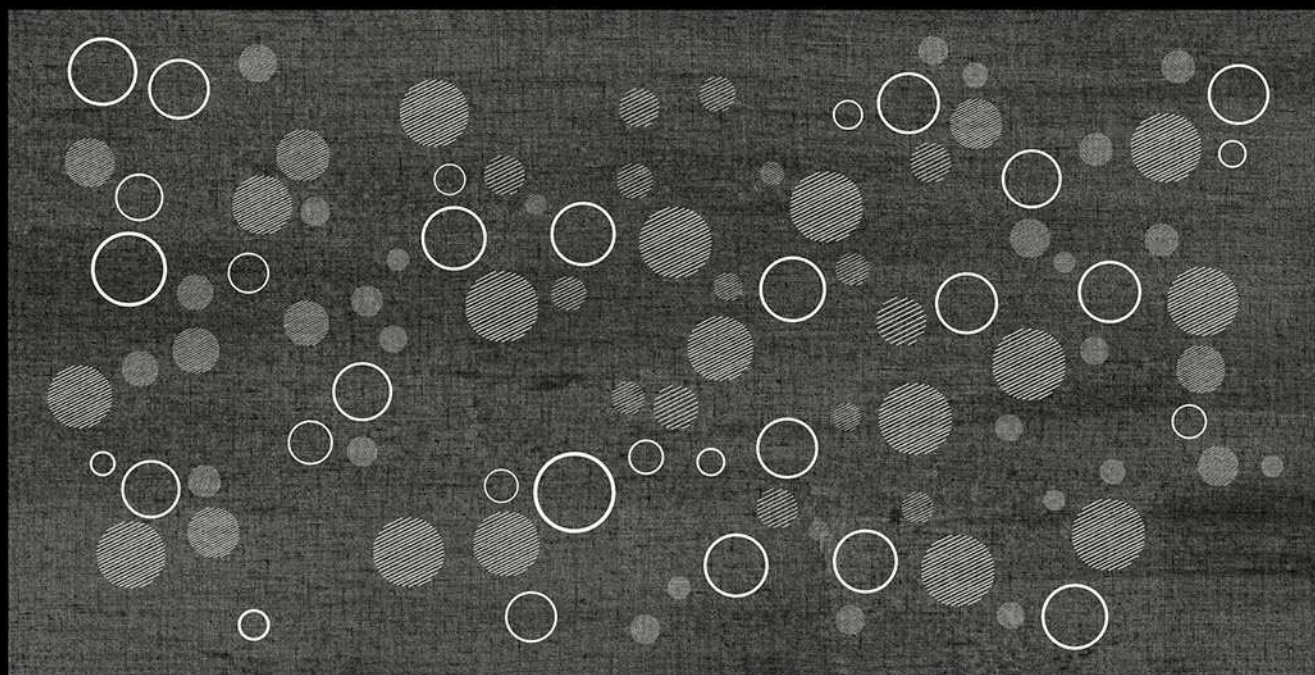

BLACK CIRCLE

MATT GRANULA

600X1200
MATT

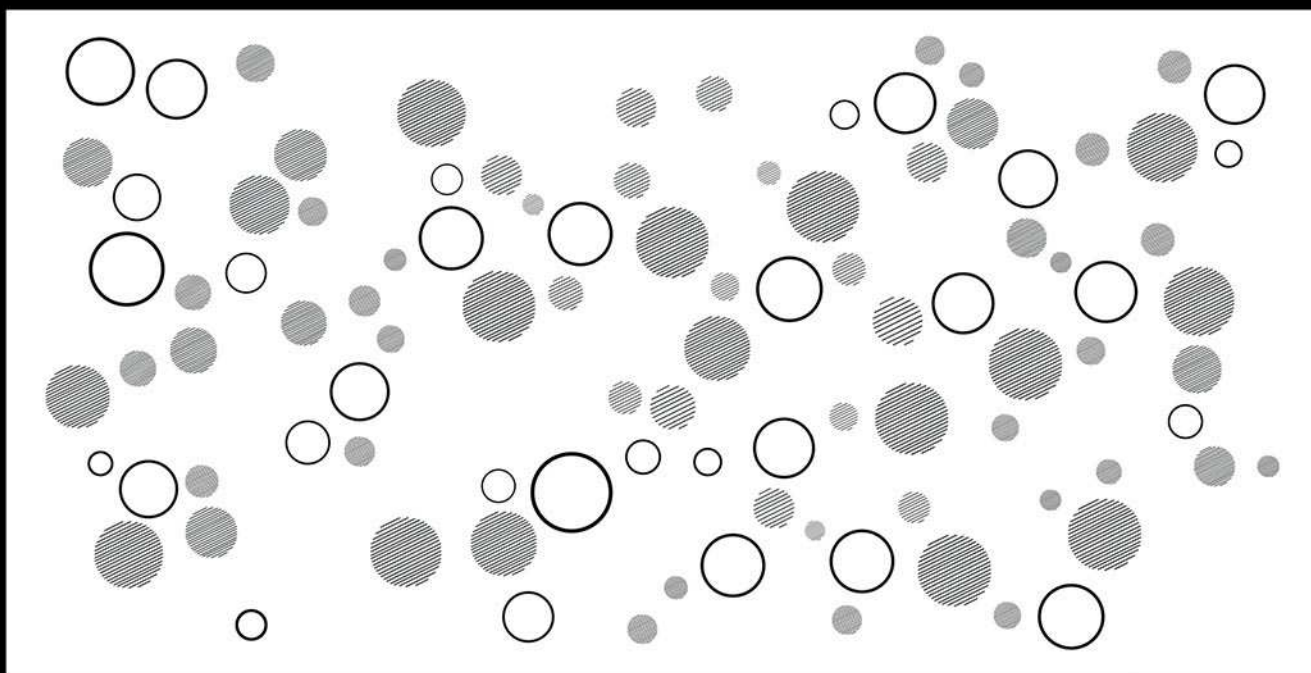

CIRCLE WHITE

MATT GRANULA

600X1200
MATT



LAVENDER

MATT GRANULA

600X1200
MATT



CARROT

MATT GRANULA

600X1200
MATT



CANVAS BIANCO

MATT GRANULA

Technical Details

NO.	ITEM	INDIAN INDEX	ISO INDEX	TILES
01	Water absorption (%)	Average Value ≤ 0.5	Average Value ≤ 0.5	≤ 0.08
02	Breaking Strength (N)	Average Value ≥ 600	Average Value ≥ 560	600
03	Modulus of Rupture (MPa)	≥ 35	≥ 35	40
04	Abrasive Resistance	$\geq$ Grade 3	-	Grade 4
05	Resistance of thermal shock	Without Cracking and spalling after test	Without Cracking and spalling after test	Without Cracking and spalling
06	Resistance of crazing	Without Cracking and spalling after test	Without Cracking and spalling after test	Without Cracking and spalling after test
07	Frost Resistance	Without Cracking and spalling after test	Without Cracking and spalling after test	Without Cracking and spalling
08	Chemical Resistance	Not Lower than grade GB	Not Lower than grade GB	Grade GA
09	Stain Resistance	Not Lower than grade III	Not Lower than grade III	Grade 5
10	Limit of Radioactive Nuclear	Type A Ira ≤ 1.0 IY ≤ 1.03	-	Type A Ira ≤ 0.40 IY ≤ 0.89
11	Elastic limit (mm)	≥ 12	-	20
12	Anti-slip slope	$\geq 12^\circ$	-	25°

Comparison of INDIAN Standard

NO.	ITEM		INDIAN INDEX	ISO INDEX	TILES
01	Size and bias (mm)	Length	± 1.0	± 0.6	$-1.0 \rightarrow -0.5$
		Width	± 1.0	± 0.6	$-0.28 \rightarrow +0.65$
		Thickness	± 0.3	-	$-0.08 \rightarrow +0.09$
		Average Thickness	≤ 6.0	-	$-4.72 \rightarrow -0.86$
		Length difference of opposite side	≤ 1.0	-	0.8
		Length difference of opposite angles	≤ 1.5	-	1.0
02	Surface Quality	-	At least 95% of plate; no obvious defects in its main area.	-	no obvious defects