

GVT/PGVT
600x1200 mm
~glossy

600x1200
GLOSSY



CALCUTTA ELITE



600x1200
GLOSSY





CARARA WHITE



600x1200
GLOSSY



OPUS WHITE

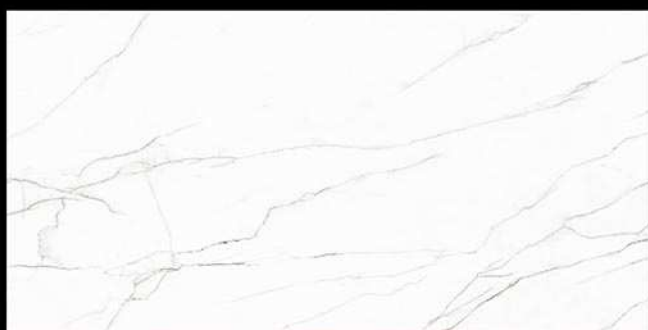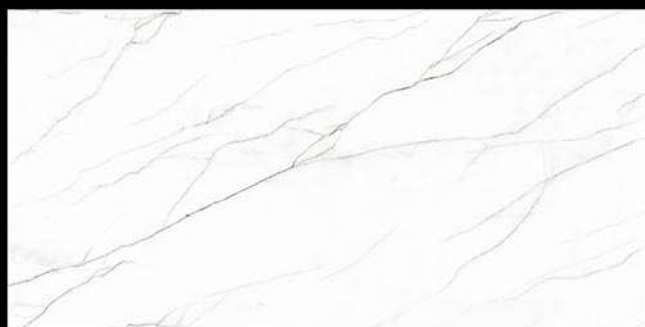

600x1200
GLOSSY



FRENCH CALCATTA



600x1200
GLOSSY



SIG STATUARIO



600x1200
GLOSSY



AQUA ONYX



600x1200
GLOSSY



OLMPIC ONYX



600x1200
GLOSSY



BOTTOCHINO



600x1200
GLOSSY



ANTIQUE MARFIL



600x1200
GLOSSY



CREMA MARFIL



600x1200
GLOSSY



ARMANI CASTAL



600x1200
GLOSSY



ARMANI CREMOS



600x1200
GLOSSY



DYNA IVORY



600x1200
GLOSSY



DYNA LIGHT



600x1200
GLOSSY



BRECCIA AURORA



600x1200
GLOSSY



BRECCIA LIGHT



600x1200
GLOSSY



BRECCIA



600x1200
GLOSSY



PULPIS BROWN



600x1200
GLOSSY



PULPIS CREMA



600x1200
GLOSSY



PULPIS GREY



600x1200
GLOSSY




SAND PEARL





600x1200

GLOSSY

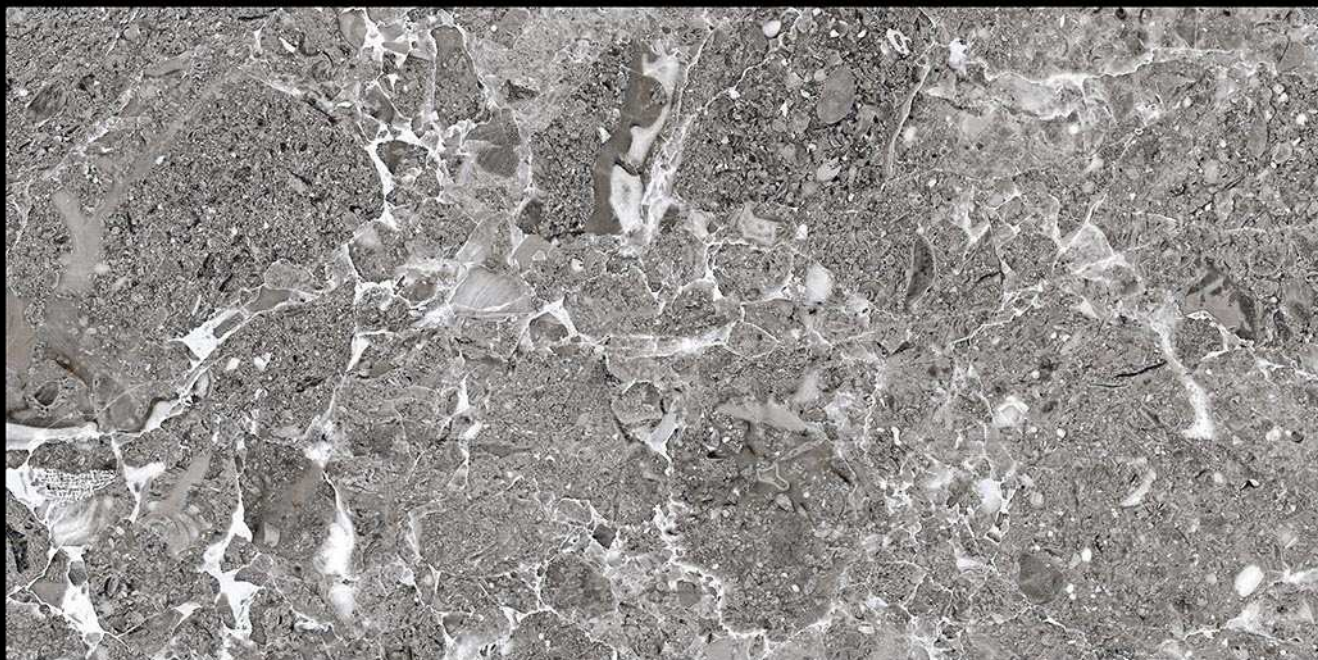

BLACK PEARL

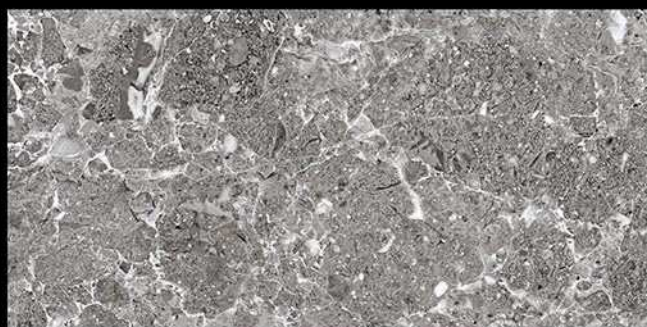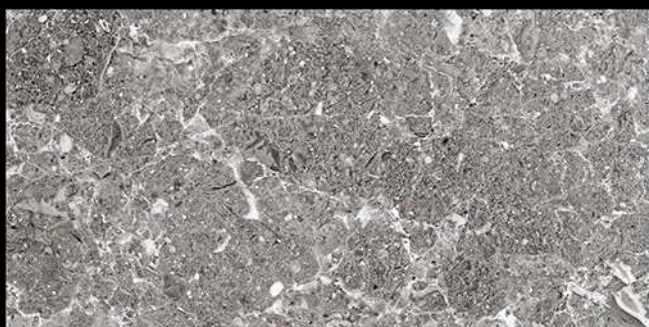

600x1200
GLOSSY



CENTURY MARBLE



600x1200
GLOSSY



COLONIAL GOLD



600x1200
GLOSSY



CREMA MAYA



600x1200
GLOSSY



EMERA ONYX CREMA



600x1200
GLOSSY



EMERA ONYX GREEN



600x1200
GLOSSY



SWISS ESPRESSO



600x1200
GLOSSY



SWISS FOSSIL



600x1200
GLOSSY



GALAXY BLACK MARBLE



600x1200
GLOSSY



RED ITALIAN MARBLE



600x1200
GLOSSY



ALICANTE ORA



600x1200
GLOSSY



VINTAGE BROWN



600x1200
GLOSSY



VINTAGE GREY



600x1200
GLOSSY



WILLIAM BRONZE



600x1200
GLOSSY



WILLIAM GREY



600x1200
GLOSSY



NAIGRA MULTI



600x1200
GLOSSY



SICILIA MARBLE



600x1200
GLOSSY



GRANITE BLUE



600x1200

GLOSSY



GRATINE BROWN



600x1200
GLOSSY



LAPIDUS YELLOW



600x1200
GLOSSY



LAPIDUS BLUE



600x1200
GLOSSY



TRAVETINO WHITE




600x1200
GLOSSY




TRAVETINO BEIGE



600x1200
GLOSSY



SUPER WHITE

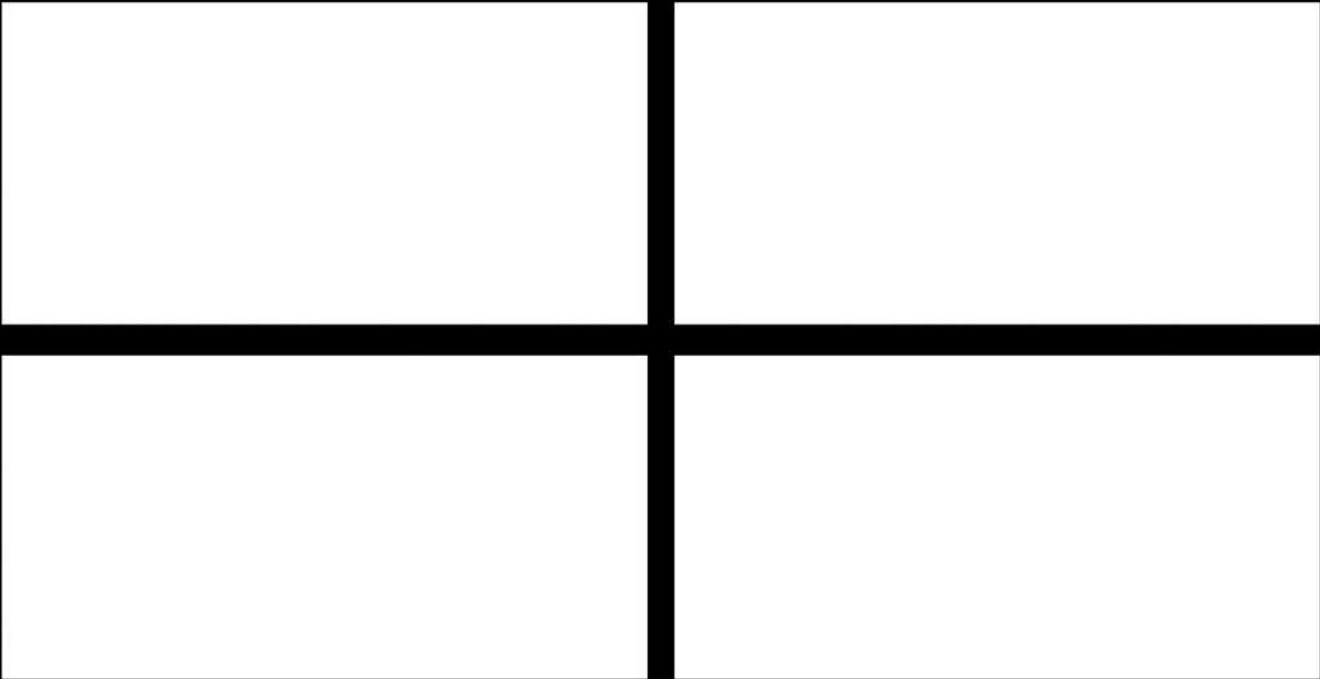

Technical Details

Comparison of Indian Standard,ISO Standard

NO.	ITEM	INDIAN INDEX	ISO INDEX	TILES
01	Water absorption (%)	Average Value ≤ 0.5	Average Value ≤ 0.5	≤ 0.08
02	Breaking Strength (N)	Average Value ≥ 600	Average Value ≥ 560	600
03	Modulus of Rupture (MPa)	≥ 35	≥ 35	40
04	Abrasive Resistance	$\geq$ Grade 3	-	Grade 4
05	Resistance of thermal shock	Without Cracking and spalling after test	Without Cracking and spalling after test	Without Cracking and spalling
06	Resistance of crazing	Without Cracking and spalling after test	Without Cracking and spalling after test	Without Cracking and spalling after test
07	Frost Resistance	Without Cracking and spalling after test	Without Cracking and spalling after test	Without Cracking and spalling
08	Chemical Resistance	Not Lower than grade GB	Not Lower than grade GB	Grade GA
09	Stain Resistance	Not Lower than grade III	Not Lower than grade III	Grade 5
10	Limit of Radioactive Nuclear	Type A Ira ≤ 1.0 IY ≤ 1.03	-	Type A Ira ≤ 0.40 IY ≤ 0.89
11	Elastic limit (mm)	≥ 12	-	20
12	Anti-slip slope	$\geq 12^\circ$	-	25°

INDIAN Standard

NO.	ITEM		INDIAN INDEX	ISO INDEX	TILES
01	Size and bias (mm)	Length	± 1.0	± 0.6	$-1.0 \rightarrow -0.5$
		Width	± 1.0	± 0.6	$-0.28 \rightarrow +0.65$
		Thickness	± 0.3	-	$-0.08 \rightarrow +0.09$
		Average Thickness	≤ 6.0	-	$-4.72 \rightarrow -0.86$
		Length difference of opposite side	≤ 1.0	-	0.8
		Length difference of opposite angles	≤ 1.5	-	1.0
02	Surface Quality	-	At least 95% of plate; no obvious defects in its main area.	-	no obvious defects